


Art.-Nr. 53316.34


Singlemode SC/SC duplex adaptor
metal housing , ceramic sleeve , with dust cap

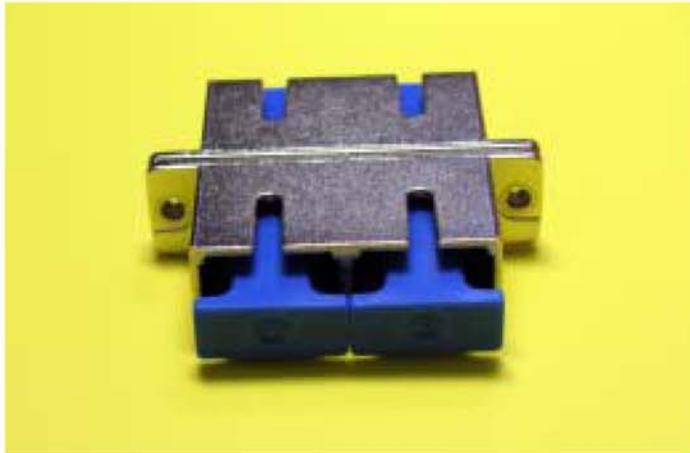

Specification

Item	Adaptors
Sleeve Material	Ceramic
Typical Insertion Loss	0.2dB
Operating Temperature	-40°C/ +75°C
Storage Temperature	-55°C/ +85°C

Mechanical Diagram

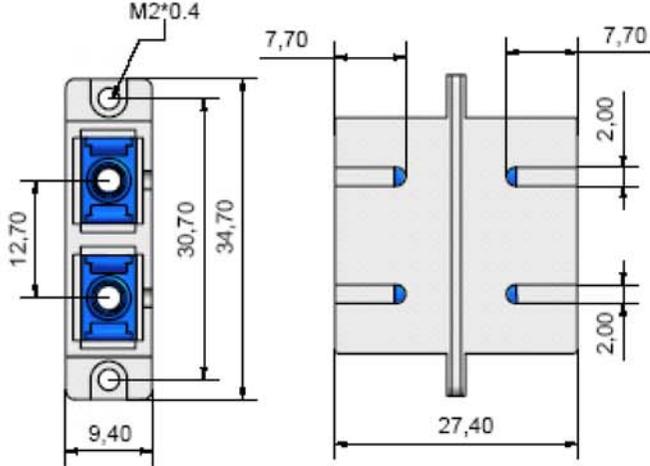

The performance of the adaptors has been carefully designed to meet the toughest Telcordia standards **EIA-455 , GR-326-CORE**

- in the tests of:
- OPTICAL CHARACTERISTICS
 - VIBRATION TEST
 - THERMAL CYCLING
 - IMPACT RESISTANCE
 - SALT SPRAY EROSION
 - THERMAL AGING
 - HUMIDITY RESISTANCE
 - OTHERS