

## 2.4 GHz 9 dBi Radome Enclosed Wireless LAN Yagi Antenna

Model: HG2409Y

### **Applications and Features**

- Applications:**
- 2.4 GHz ISM Band
  - IEEE 802.11b and 802.11g Wireless LAN
  - Directional and multipoint applications
  - Bluetooth®
  - Public Wireless Hotspot
  - WiFi
- Features:**
- Superior performance
  - Light weight
  - All weather operation
  - UV-stable, UL flame rated radome
  - 60° beam-width
  - DC Short lightning protection
  - Can be installed for either vertical or horizontal polarization
  - Includes tilt and swivel mast mount
  - Optional wall/ceiling mount available



### **Description**

#### **Superior Performance**

The HyperGain® HG2409Y Radome Enclosed Yagi WiFi Antenna features high gain and a 60° beam-width. It is ideally suited for directional and multipoint IEEE 802.11b and 802.11g wireless LANs, Bluetooth®, public wireless hotspot applications and other systems operating in the 2.4GHz ISM band. The unique design of this antenna allows it to be installed for either vertical or horizontal polarization.



#### **Rugged and Weatherproof**

This WiFi antenna is enclosed within a UV-stable, UL flame rated radome for all-weather operation. The HG2409Y antenna is supplied with a 60 degree tilt and swivel mast mount kit.

## Specifications


### Electrical Specifications

<b>Frequency</b>	2400-2500 MHz
<b>Gain</b>	9 dBi
<b>-3 dB Beam Width</b>	60 degrees
<b>Impedance</b>	50 Ohm
<b>Max. Input Power</b>	50 Watts
<b>VSWR</b>	< 1.5:1 avg.
<b>Lightning Protection</b>	DC Short


### Mechanical Specifications

<b>Weight</b>	.46 lbs. (.21 kg)
<b>Dimensions</b> <b>Length x Diameter</b>	6 x 3 (inches) 152 x 76 (mm)
<b>Radome Material</b>	UV-inhibited Polymer
<b>Flame Rating</b>	UL 94HB
<b>Operating Temperature</b>	-40° C to 85° C (-40° F to 185° F)
<b>Mounting</b>	1-1/4" (32 mm) to 2" (51 mm) dia. masts
<b>Polarization</b>	Vertical and Horizontal
<b>Wind Survival</b>	>150 MPH

### Antenna Gain Patterns

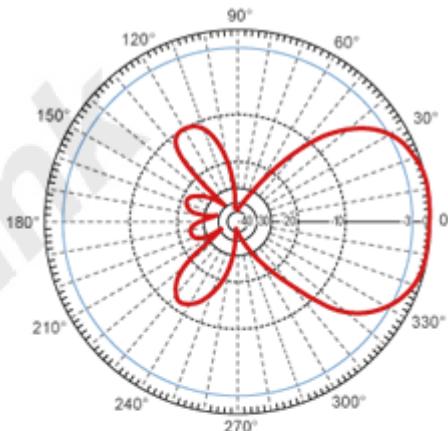

**Vertical**

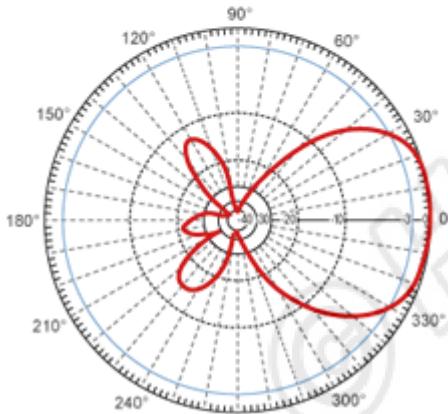

**Horizontal**

**Mounting Options**

	Description	Part Number
	Ceiling/Wall Universal Antenna Mount can be used with HyperLink's 4.5" sq and 8.5" sq. patch antennas as well as N-Type bulkhead and TNC/BNC bulkhead omni directional antennas. Includes ceiling/wall mounting hardware.	<b>HGX-Umount02</b>
	Universal Corner Mounting Bracket: This bracket is designed to mount to an outside corner of a structure. It can be used with HyperLink's 4.5" and 8.5" sq. patch antennas, radome enclosed Yagi antennas, the HGX-PMT02 tilt & swivel bracket and can also accommodate the SC2402N and SC5802N 2-Way signal splitters as well as HyperAmp outdoor amplifiers.	<b>HGX-Umount03</b>