


Synergy 21 LED subordinate garden lamp 15W RGB+CCT with RF and WLAN IP65 24V Milight/Miboxer*



kwh/1000h:	16,50
Lumens:	1200
Watt:	15,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

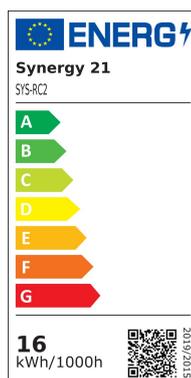

Transform your outdoor area into a radiant oasis of light with the **15W RGB+CCT LED Garden Light**. This powerful **Subordinate Lamp** offers you outstanding lighting quality and remarkable flexibility in lighting design.

With an **input voltage of DC24V** and an **output of 15W**, the LED garden light delivers an impressive **brightness of 1200LM**. The **colour temperature of 2700K to 6500K** allows you to adjust the lighting mood according to your wishes, while the **light output of 80LM/W** ensures energy-efficient use.

The garden light offers a **lifespan of up to 50,000 hours**, which ensures long-lasting enjoyment. With a **beam angle of 15°** and an **illumination distance of over 10 metres**, it provides targeted and far-reaching illumination. The **IP65 housing** protects the light from the weather and guarantees its durability, even in extreme weather conditions.

The housing of the **LED Garden Light** is made of high-quality **stainless steel and PC**, which ensures an elegant appearance and high resistance. With a **kWh/1000h value of 15**, it is also a cost-effective choice for your lighting needs.

Optimise your outdoor lighting and enjoy the benefits of the **15W RGB+CCT LED Garden Light** – for a stylish and functional lighting ambience in your garden.

Product Name: 15W RGB+CCT LED Garden Light (Subordinate Lamp)
Model No.: SYS-RC2
Input Voltage: DC24V
Power: 15W
Working Temperature: -20~60?
Colour temperature: 2700~6500K

Luminous Flux: 1200LM
Light Efficiency: 80LM/W
CRI: >80
Lifespan: 50000h
Illumination distance: >10m
Beam Angle: 15°
IP Rate: IP65
Housing Material: Stainless Steel+PC

Energy efficiency class: A+
kWh/1000h: 15


Attributes

Attribute	Value
Abstrahlwinkel:	15
Ampere:	0.625000
CC oder CV:	CV
Dimmbar:	Ja
Grösse:	170*51*180
LED - Gehäusematerial:	Stahl
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	1200
Schutzklasse:	IP65
Volt:	24
Weight:	0.4 Kg

Additional Images

Product Parameters

Product Name: 15W RGB+CCT LED Garden Light
(Subordinate Lamp)
Model No.: SYS-RC2
Input Voltage: DC24V
Power: 15W
Working Temperature: -20~60°C
Color temperature: 2700-6500K
Luminous Flux: 1200LM
Light Efficiency: 80LM/W
CRI: >80
Lifespan: 50000h
Illumination distance: >10m
Beam Angle: 15°
IP Rate: IP65
Housing Material: Stainless Steel+PC



Wireless Remote Controlling by connecting the Host Controller(SYS-T1)



Waterproof and Dustproof rate: IP65



Freely Adjustment, Easy & Convenience

360° Rotate Moving, 180° Vertical Moving, Easy To Adjust



High efficiency heat dissipation

Integrative Aluminum design, Inserted thermal conduction, with thermal convection in air movement, Protect light source lifespan

Power cable nut

Adopt stainless steel materials waterproof and dustproof Never Rusting




Anticorrosion inserted pole

High quality Aluminum, longer and more thick strong anticorrosion



Connection Diagram

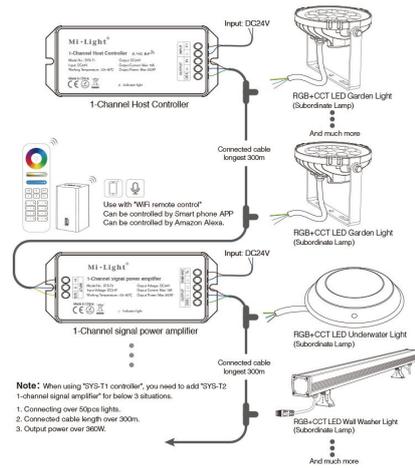

COMPATIBLE REMOTE SHEET

Product	Compatible Remote

Accessories

Part No.	Name
158699	Synergy 21 LED subordinate garden lamp 15W RGB+CCT with RF and WLAN IP65 24V Milight/Miboxer*
158700	Synergy 21 LED subordinate garden lampe 9W RGB+CCT with RF and WLAN IP65 24V *Milight/Miboxer*
158702	Synergy 21 LED subordinate pool light 12W RGB+CCT with RF and WLAN *Milight/Miboxer*
158703	Synergy 21 LED subordinate wall washer 24W RGB+CCT IP66 24V *Milight/Miboxer*
158704	Synergy 21 LED subordinate controller 1-channel amplifier *Milight/Miboxer*
158705	Synergy 21 LED subordinate controller 1-channel host *Milight/Miboxer*
158962	Synergy 21 LED subordinate kabel/plug SYS series *Milight/Miboxer*
158963	Synergy 21 LED subordinate kabel/plug SYS series *Milight/Miboxer*
158964	Synergy 21 LED subordinate kabel/plug SYS series *Milight/Miboxer*
158965	Synergy 21 LED subordinate kabel/plug SYS series *Milight/Miboxer*